

CARACTERISTICAS




Disponibles en 2 velocidades

TECLE CON CARRO AMEH	AMEH05-02S	AMEH7.5-03S	AMEH10-04S
	5.000 Kg	7.500 Kg	10.000 Kg
CAPACIDAD	5000	7500	10000
VELOCIDAD DE ELEVACION (m/min)	2.7 2.7/0.9 (2vel)	1.8 1.8/0.6 (2vel)	2.7 2.7/0.9 (2vel)
POTENCIA DEL MOTOR DE ELEVACION (kw)	3 3/1 (2 vel)	3 3/1 (2 vel)	3x2 3x2 / 1x2 (2 vel)
VELOCIDAD DE TRASLADO (m/min)	21 21/5 (2 vel)	21 21/5 (2 vel)	21 21/5 (2 vel)
POTENCIA DEL MOTOR DE TRASLACION (kw)	0.4 0.8/0.27 (2 vel)	0.4 0.8/0.27 (2 vel)	0.8 0.8/0.27 (2 vel)
FUENTE ALIMENTACION (v)	380	380	380
VOLTAJE BOTONERA (V)	24v	24v	24v
Nº DE CADENAS	2	3	4
ANCHO DE VIGA (mm)	100-178	100-178	150-220
DIAMETRO CADENA (mm)	10	11.2	11.2



*Imagen referencial 10t

DIMENSIONES

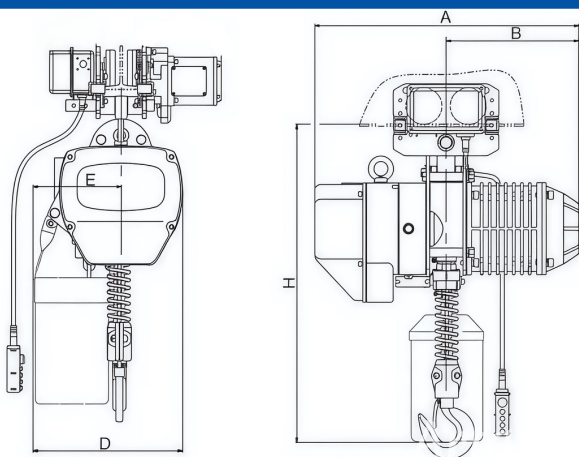

		5.000Kg	7.500 Kg	10.000Kg
DIMENSION (mm)	H	1015	1200	1310
	A	615	630	670
	B	295	315	388
	D	430	890	1070
	E	325	445	535
Peso (kg)		220	260	380

SEGURIDAD

- Cumple con estándares internacionales.
- Cadena Grado 80.
- Grado trabajo M3.

